


■ RM065-V2 可调电阻模样图 ↓



■ RM065-V2 尺寸图 ↓

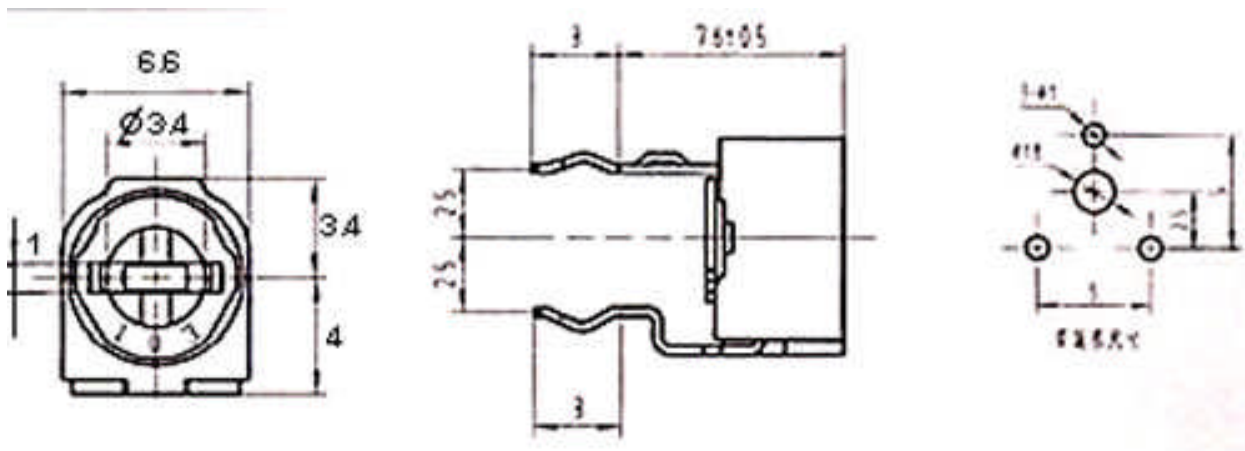

■ 技术参考数据 ↓

Total Rotational Angle 旋转角度: $210^{\circ} \pm 20^{\circ}$

Rotational Torque 旋转力矩: 20~250gf.cm

Stoppe Strength 止挡强度: > 350gf.cm

ENDURANCE 耐久性能

Rotation Life 旋转寿命: 20 ± 2 cycles

Operatton Temperature Range 工作温度: $-10^{\circ}\text{C} \sim +70^{\circ}\text{C}$

Total Resistance & Tolerance 总阻误差: $100\Omega \sim 1\text{M}\Omega \pm 30\%$

Resistance Taper 电阻特性曲线: 8-taper

Power Rating 负载功率: 0.1W (At 50°C)

Max Operating Voltage 最大工作电压: 50V/DC (> 500K Ω 25V/DC)

Residual Resistance 残留电阻: $R < 1\text{K}\Omega : 30\Omega \text{ Max}$
 $R > 1\text{K}\Omega : 3\% \text{ Max}$