


■ 3296W 精密电位器模样图 ↓



■ 3296W 尺寸图 ↓

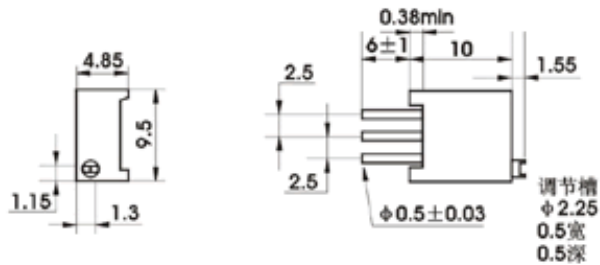


■ 技术参考数据 ↓

- 標稱阻值範圍 (Range of nominal resistance) 50Ω-2MΩ
- 阻值允許偏差 (Resistance tolerance) ± 10%
- 終端電阻 (Terminal resistance) < 1%R或10Ω
- 接觸電阻變化 (Contact resistance variation) CRV < 3%R或5Ω
- 絕緣電阻 (Insulation resistance) $R_i > 1G\Omega(100vac)$
- 耐電壓 (withstand voltage) 640vac
- 極限動觸點電流 (limit current of moving contact) 100mA
- 有效電行程 (Effective Electrical travel)
- > 總機械行程的70% (> 70% of total mechanical travel)

額定功率(Rated power) (315v max) 0.5w 70C .ow 125C
 溫度範圍(Temperture range) -55C ~+125C
 溫度系數 TCR ± 250 ppm/C
 溫度變化(Temperature varation) -55C .30min.+125C .30min
 循環5次 5cycles $\Delta R < 5\%R$, $\Delta(Uab/Uac) < 5\%$
 振動(Vibration) 10 -500Hz. 0.75mm 6h
 電氣間斷 < 100 u s(electrical Interruption < 100 u s)
 $\Delta R < 5\%R$, $\Delta(Uab/Uac) < \pm 7.5\%$
 碰撞 (Collision) $390m/s^2$.4000次 (4000 cycles) $\Delta R < 5\%R$
 氣候順序 (Climate category)
 IEC68-2-2等(meet IEC68-2-2etc) $\Delta R < 10\%R$, $R_1 >_{100M} \Omega$
 70C 電氣耐久性 (Electrical endurance at 70C)
 0.5w,1000h CVR $< 10\%R$, $R_1 >_{100M} \Omega$
 機械耐久性 (Mechanical Emdurance)
 200周 (200cycles) $\Delta R < 10\%R$, CRV $< 3\%R$ 或 5Ω
 穩態濕熱 (Steady damp-heat)
 IEC 68-2-3 Ca 96h $\Delta R < 10\%R$, $R_1 >_{100M} \Omega$

總機械行程 (Total Mechanical Travel) 30 ± 2 圈^o (30 ± 2 turns)
 起動力矩 (Starting Torque) < 35 mN.m
 標志 (Mark)
 阻值允許偏差 (10%不標注). 阻值代碼 產品型號
 Resistance tolerance (when no identification. It is of $\pm 10\%$) resistance
 code type
 標準包裝 (Standard packaging) 50只/管 (50pcs per tube)

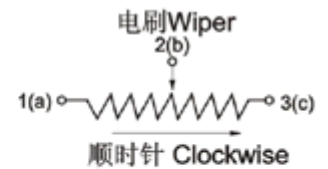

图中公差：除注明外均为 ± 0.25
 Tolerance is ± 0.25 ,if no identification