



■ 3386P 精密电位器模样图 ↓

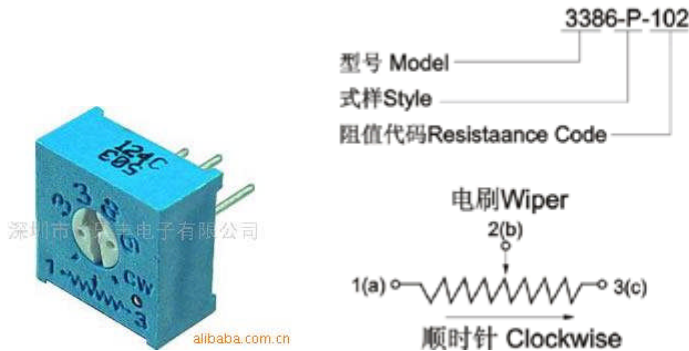

图中公差:
除注明外
均为 ±0.25
tolerance is ±0.25
if no identification

■ 3386P 尺寸图 ↓

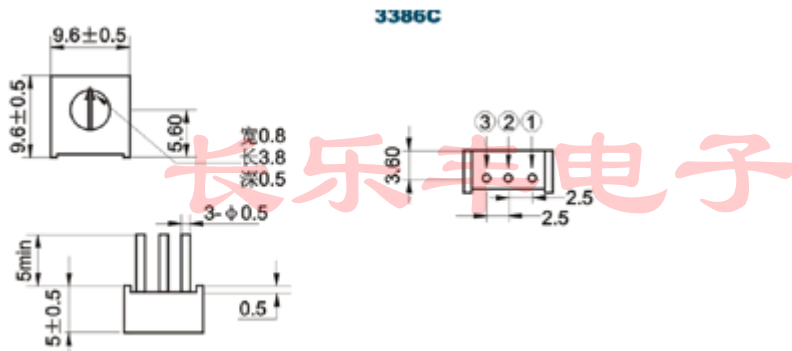

0755-83281866

■ 技术参考数据 ↓

標稱阻值範圍(Range of nominal resistance) 50Ω-2MΩ
阻值允許偏差(Resistance tolerance) ± 10%
終端電阻(Terminal resistance) < 1%R 或 10Ω
接觸電阻變化(Contact resistance variation) CRV < 3%
耐電壓(Withstand voltage) 600Vac
絕緣電阻(Insulation resistance) R1 > 1GΩ (100vac)
有效電行程(Effective Electrical travel)
> 總機械行程的 70% (> 70% of total mechanical travel)

額定功率(Rated power) (200v max) 0.5w 70°C .ow 125°C
溫度範圍(Temperature range) -55°C ~ +125°C
溫度系數 TCR ± 250ppm/°C
溫度變化(Temperature variation) -55°C .30min. +125°C .30min
循環 3 次 3 cycles ΔR < 5%R, Δ(Uab/Uac) < 10%
碰撞(Collision) 100m/s².16ms, 1000 cycles
ΔR < 2%R Δ(Uab/Uac) < 10%
機械耐磨(Mechanical Wear-resistance)
200 周 (200 cycles) ΔR < 10%R
恒定濕熱(Steady damp-heat)
40 ± 2°C, 87-92%RH, 96h ΔR < 5%R, R1 > 1MΩ

總機械行程 (Total Mechanical Travel) Angle $300 \pm 10^\circ\text{C}$
起動力矩 (Starting Torque) $< 35\text{mN.m}$
標志 (Mark)
阻值允許偏差 (10%不標注). 阻值代碼 產品型號
Resistance tolerance (when no identification. It is of $\pm 10\%$)
resistance code type
標準包裝 (Standard packaging) 50只/管 (50pcs /tube)

长乐丰电子

0755-83281866