


■ 3329H 精密电位器模样图 ↓



■ 3329H 尺寸图 ↓

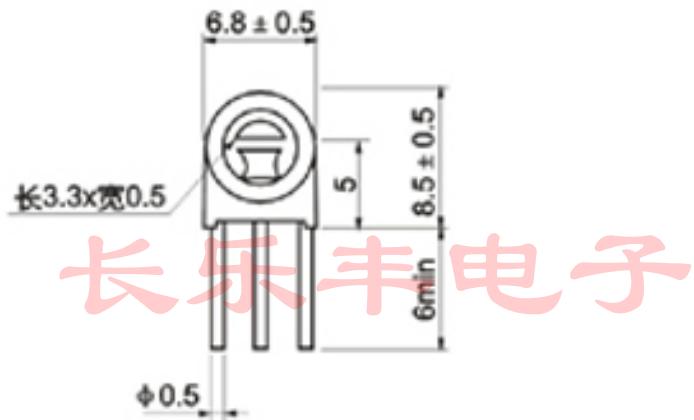

■ 技术参考数据 ↓ (共 2 页)

0755-83281866

標稱阻值範圍(Range of nominal resistance) 5Ω - $2M\Omega$

阻值允許偏差(Resistance tolerance) $\pm 10\%$

終端電阻(Terminal resistance) $<1\%R$ 或 10Ω

接觸電阻變化(Contact resistance variation) CRV $<3\%R$

耐電壓(withstand voltage) $510V_{ac}$

絕緣電阻(Insulation resistance) $R_i > 1G\Omega$ (100vdc)

極限動觸點電流 (Limit current of moving contact) 100mA

有效電行程(Effective Electrical travel)

$>$ 總機械行程的70% ($> 70\%$ of total mechanical travel)

額定功率(Rated power) (250v max) 0.5W 70C .ow 125C

溫度範圍(Temperature range) -55C ~+125C

溫度系數 TCR $\pm 250 \times 10^4 M/C$

溫度變化(Temperature variation) -55C .30min.+125C .30min

循環5次 5cycles $\Delta R < 3\%R$, $\Delta(U_{ab}/U_{ac}) < 2\%$

碰撞 (Collision)390m/s².4000次 4000 cycles $\Delta R < 2\%R$



機械耐久性 (Mechanical Wear-resistance)

200周 (200cycles) $\Delta R < 5\%R$, CRV $< 3\%R$


恒定濕熱 (Steady damp-heat)

IEC68-2-3,Ca 96h $\Delta R < 5\%R$ $R_i > 100M\Omega$

總機械行程 (Total Mechanical Travel) Angle $280^\circ \pm 10^\circ$
起動力矩 (Starting Torque) <35mN.m

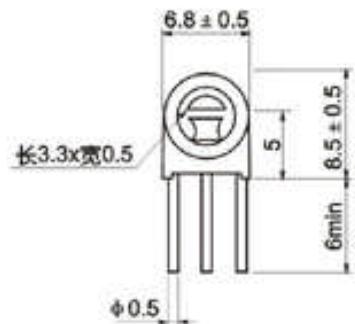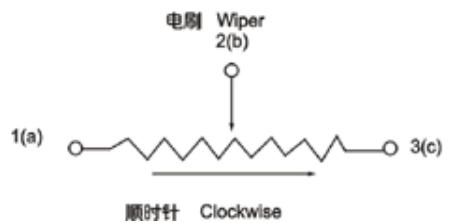


3329X

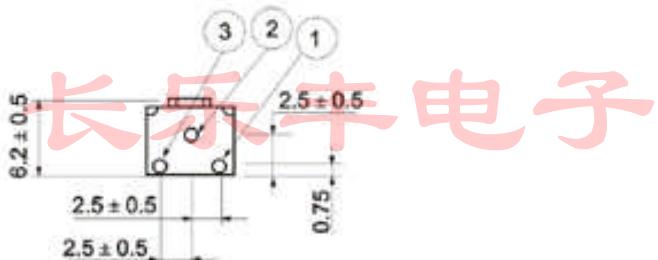

3329H

0755-83281866

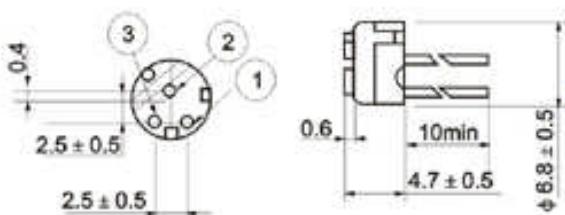

3329S

